

553,934

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094290 A2

(51) International Patent Classification⁷: **B66B 13/26**,
E05F 15/00

Christopher [GB/GB]; September Cottage, Murrell Hill
Lane, Binfield, Berkshire RG12 5DA (GB).

(21) International Application Number:
PCT/GB2004/001764

(74) Agents: **MOIR, Michael, Christopher** et al.; Mathys &
Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).

(22) International Filing Date: 26 April 2004 (26.04.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0309310.1 24 April 2003 (24.04.2003) GB

(71) Applicant (for all designated States except US): **MEMCO
LIMITED** [GB/GB]; Memco House, Waldeck Road,
Maidenhead, Berks SL6 8BZ (GB).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PLATT, Terence**,

[Continued on next page]

(54) Title: MULTIFUNCTION EDGE DEVICE FOR POWERED DOORS

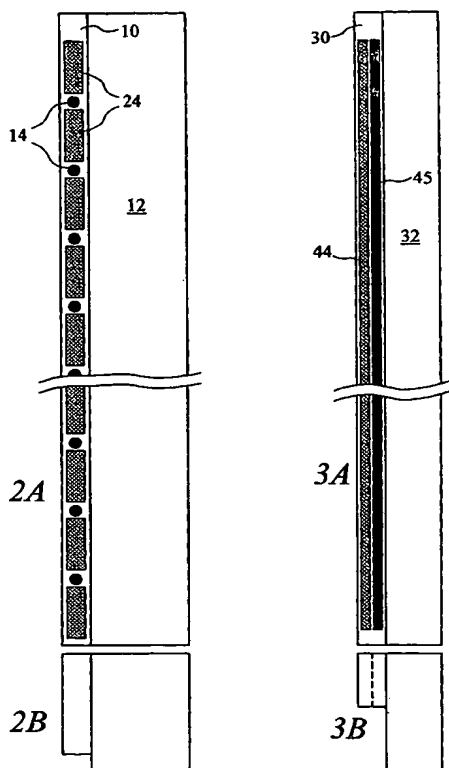

(57) Abstract: An edge device for an elevator door includes an elongate array of infrared transmitters and/or receivers and a proximate elongate array of illuminable elements, both arrays extending for a substantial part of the length of the door. The illuminable elements are adapted to be illuminated when the door is in motion. The two arrays are disposed in a common carrier structure, being either vertically interleaved or extending vertically in parallel with each other.

WO 2004/094290 A2



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*